




## Hybrid construction adhesive

### Black

Article number: 613531

Date: 29-03-2024

Hybrid construction adhesive  
Black

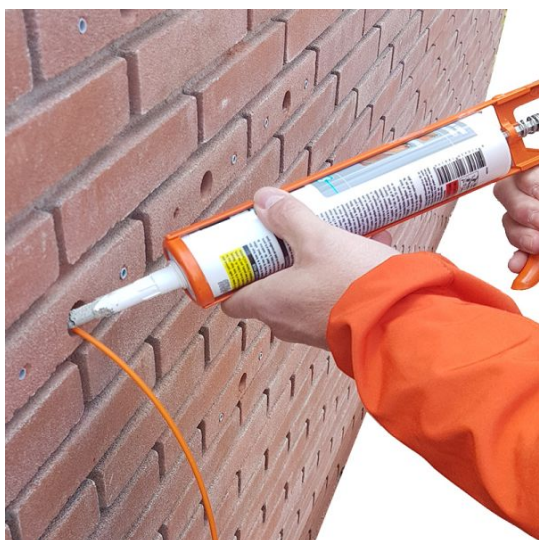



## Hybrid construction adhesive - black

ACE-DS-613531-v01-e

datum : 24-06-2021

### Product

The hybrid adhesive is a 1K power glue and is used to seal the cable entry in the stucco. The product offers very good adhesion to almost all usual construction substrates, also damp ones.

The product complies with the requirements of the GEV-Emicode EC 1 plus standards.



### Functionality

The hybrid power adhesive is used when sealing the OWST multi dwelling plug. Refer for further information to <https://www.tkf-telecom.eu/613506.html>.

When the adhesive is applied in combination with a 3mm PA tube, a retention force of > 30N will be achieved.

This kit is not part of the OWST kit. The product is available separately as item number 613531.

### Specification

Contents	[ml]	450
Color		black
Environmental conditions		very good UV, weathering and seawater resistance
Skin formation time (@ 20 °C / 50% rel. hum.)	[min]	~5
Hardening speed (@ +20 °C)	[mm]	appr. 3 (in 24 h)
Temperature resistance	[°C]	-30 / +80 (short term up to +120)
Viscosity (@ +20 °C)		Highly viscous – pasty
Density (EN 542 @ 20°C)	g/cm <sup>3</sup>	~1,47

### EC1 certificate

In the appendix the EMICODE certificate is included.

### Logistic information

The hybrid adhesive is delivered in a cartouche. Minimum order quantity: 10 cartouches.



## Appendix

### Appendix 1 – GEV-Eimcode EC 1 plus certificate



Adobe Acrobat  
Document