



Tube connector reduction


secure clip

Group: Tube connector reduction

Date: 24-05-2024

ACE provides a complete program of high quality tube connectors with functionalities like straight, end, reduction and gas-block. Connectors are available for duct install (DI) or direct burial (DB) applications.

ACE tube connectors comply to EN 50411-2-8:2009. Installation of the connector is performed without tooling.

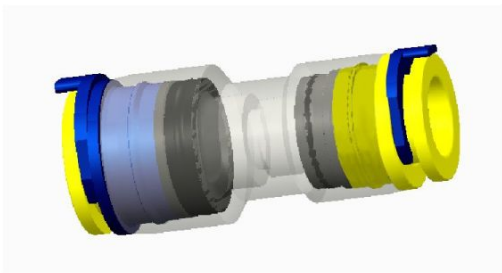

Product characteristics

Fixation	Push-fit
Way of locking	Clip
Tube material	HDPE
Re-usable	Yes

Application

Application area	OSP connectors, end caps, gas block
------------------	-------------------------------------



Logistical specifications

Unit	piece(s)
------	----------

Products

Article number	Type	Application	Tube outer diameter 1	Tube outer diameter 2	Bore	Length	Outer diameter	Netto weight (kg/m)
510627	Reduction	DI	7	5	3,5 mm	38,6 mm	14,7 mm	0.005
510625	Reduction	DI	12	10	8,0 mm	48,5 mm	21 mm	0.016
510626	Reduction	DI	14	12	10,0 mm	50,4 mm	23,5 mm	0.02
510629	Reduction	DB	16	14	10,0 mm	54,0 mm	25,0 mm	0.024
510628	Reduction	DB	10	7	4 mm	47,8 mm	18,9 mm	0.008